VG-PB200D-D 200W RGBW 4in1 LED Fresnel Spot light User Manual

200W RGBW 4in1
LED Fresnel Spot Light

VG-PB200D-D



CE RoHS

User Manual

📖Please read this user manual before using this product!

Keep it for further reference!

http://www.vangaa.com

INDEX

Ⅰ PRODUCT MAIN FEATURES..... 01

Ⅱ OVERVIEW AND DIMENSIONS.....02

Ⅲ SAFETY INFORMATION 02

Ⅳ POWER CONNECTION 03

Ⅴ CONTROL PANNEL 06

Ⅵ DMX PROTOCOL.....09

Ⅶ COMMON INSTRUCTION 10

Ⅷ TECHNICAL SPECIFICATION 11

Ⅸ APPENDIX 11

VG-PB200D-D 200W RGBW 4in1 LED Fresnel Spot light User Manual

Thank you for using our product! Please read this manual carefully and completely. For technical reference in future, please keep this user manual well. This user manual contains all installation and operation information of this LED Studio Focalize Light, it's very useful for user to install and operate the light. Please strictly abide by the relevant instruction for the installation and operation.

This light has very beautiful appearance. Based on the LED Film and Television Flat Light Technology, using high brightness COB LED chips beads matrix arrangement of large area, through the whole aluminum shell to realize heat dissipation naturally, we have designed this light. This light has high brightness, good head dissipation, ultra-quiet and other features. It can satisfy the requirement of indoor movie filming for the lighting layout. It is a good substitute of the traditional Fresnel spot light, which is very suitable for the studio room, TV station, Meeting room, stage, show and other entertainment places.

This light meets the following criteria:

GB7000.1-2007/IEC60598-1:2003

GB7000.217-2008/IEC60598-2-17:1984+A2:1990

Ⅰ PRODUCT MAIN FEATURES


The light's lighting function is controlled by DMX-512, very convenient;
Using international standard (1990) DMX single, digital control panel display;
With 1 DMX channel as dimmer; (Strobe channel closed)
Dimmer range: 0~100%, 0~15% dimmer smoothly;
CRI more than 92, RGBW color mixing, and can mix different color temperature, light effective distance is 3~15 meters;
Cast aluminum radiator, equips copper tube radiator, no need fan cooling, realize the silent,

intelligent temperature control system, improve the quality of our products stable performance, apply to indoor installation.

Using brand LED chips, integrated encapsulation, improve reliability and long lifespan.

Using the advanced optical reflective material, make the light on the projection distance and brightness is higher than traditional film soft light.

Ⅱ OVERVIEW AND DIMENSIONS

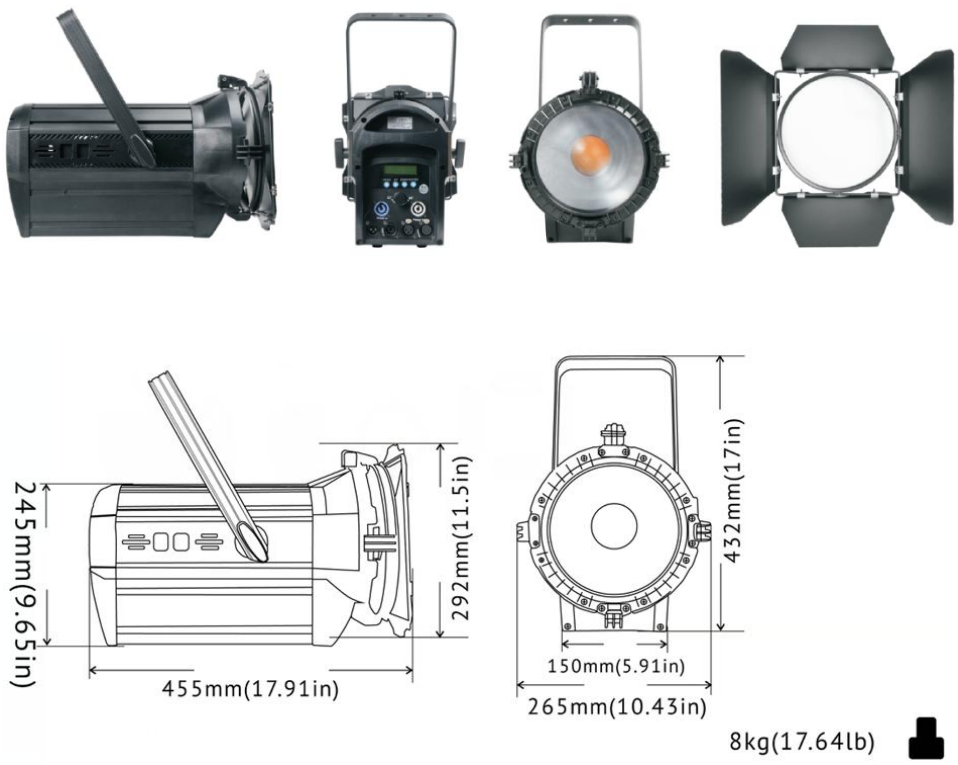

All dimensions are in millimeters

Ⅲ SAFETY INFORMATION

※Important

Every person involved with the installation, operation and maintenance of this device has to be qualified and follow the instructions of this manual. Manufacturer will not with responsibility for those operations which are not according to this Instruction.

Verify that the voltage matches the rated voltage.

When the voltage is 110V, Do not connect more than 10 lightings in total to AC mains power in one interconnected daisy chain

When the voltage is 220V, Do not connect more than 20 lightings in total to AC mains power in one interconnected daisy chain

Before using the fixture, check that all power distribution equipment and cables are in perfect condition and rated for the current requirements of all connected devices.

Always ground (earth) the fixture electrically.

Avoiding hit the Light when you are move or install the light.

The minimum distance between light-output and the illuminated surface must be more than 0.5 meters. Keep all combustible materials (for example fabric, wood, paper) at least 0.2 meters away from the fixture.

Do not expose the fixture to rain or moisture.

Avoid looking directly into the light source (especially those who suffer from epileptic fits)

Maximum ambient temperature (Ta) is 40°C. Do not operate fixture at temperatures higher than this.


The Maximum surface temperature is 50°C

When suspending the fixture above ground level, verify that the structure can hold at least 10 times the weight of all installed devices.

Verify that all external covers and rigging hardware are securely fastened and use an approved means of secondary attachment such as a safety cable.

Ⅳ POWER CONNECTION

INSTALLING A NENUTRIK CONNECTOR ON A POWER CABLE

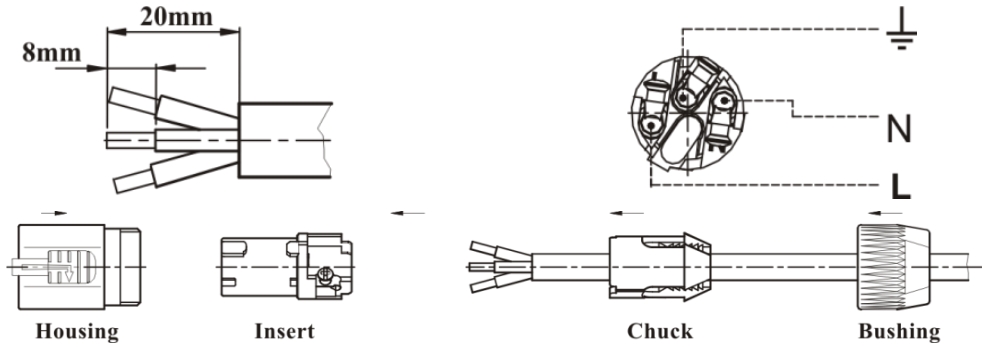

Put bushing and chuck onto the cable.

Prepare cable as shown above. The power cable must is a three-conductor 2.5mm2 cable.

Insert the wire into the terminals and fasten the clamping device by a flat screw driver.


Push insert and chuck into housing (pay attention to the guiding keyway).

Fasten bushing.

The color-coding schemes and some possible pin identification schemes; if pins are not clearly identified, or if you have any doubts about proper installation, consult a qualified electrician.

RELAYING POWER TO OTHER DEVICES

The lightings can be linked in a chain by power cables which installed a blue and a light-gray connectors on the two ends. The light-gray connector connects to the power out socket of the first lighting, and the blue connector connects to the power in socket of the subsequent lighting, and so on.

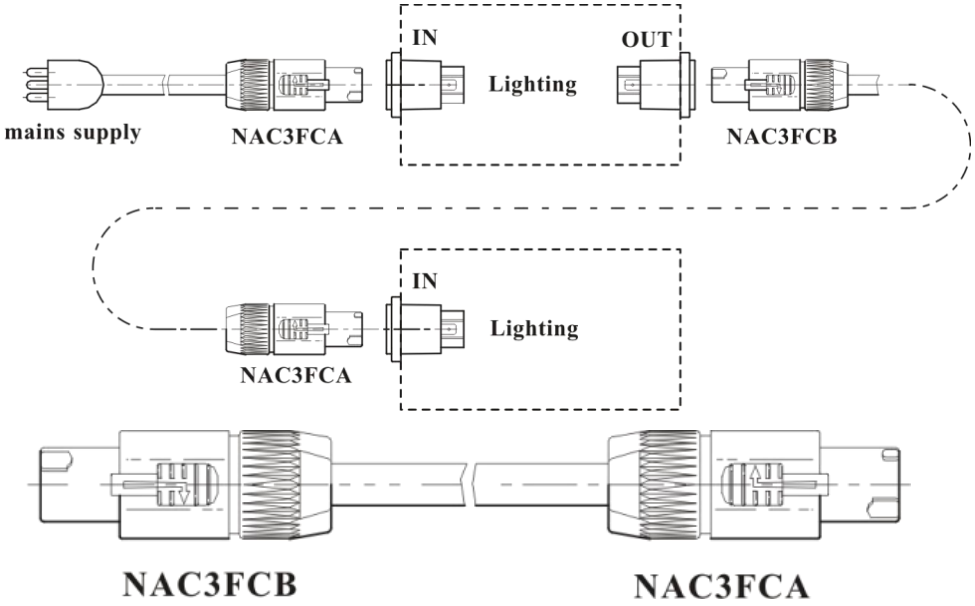

The power cable must is a three-conductor 2.5mm2 cable.

When the voltage is 110V, Do not connect more than 10 lightings in total to AC mains power in one interconnected daisy chain.

When the voltage is 220V, Do not connect more than 20 lightings in total to AC mains power in one interconnected daisy chain.

Wire color	Conductor	Symbol
Brown	Live	L
Blue	Neutral	N
Yellow/green	ground	⏚

PHYSICAL INSTALLATION

This lighting can be placed on a horizontal surface such as a stage or clamped to a truss or


similar rigging structure in any orientation using a rigging clamp.

When suspending the fixture above ground level, verify that the structure can hold at least 10 times the weight of all installed devices.

Verify that all external covers and rigging hardware are securely fastened and use an approved means of secondary attachment such as a safety cable.

V CONTROL PANNEL

BUTTON

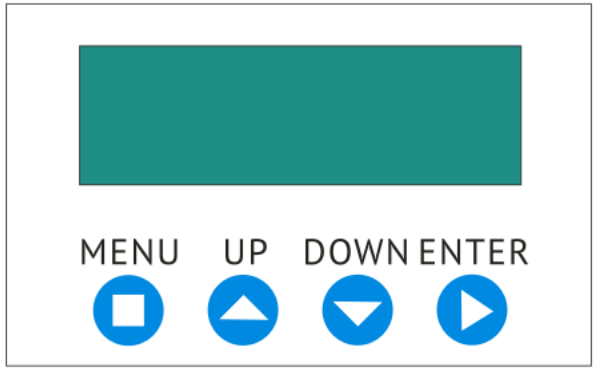

MENU Call the main menu, or escape the current menu, (i.e. return to the upper menu and give up the selected item or parameter).

UP Browse the menu item forward or increase the parameter.

DOWN Browse the menu item backward or decrease the parameter.

ENTER Confirm the selected item or parameter, (i.e. enter into the next menu, or escape the current menu and save the selected item or parameter).

MAIN MENU

The way into the menu as below:

1. Press **ENTER** when the display show the title information;
2. Press **UP** or **DOWN** button to choose the right menu which you need;
3. Press **ENTER** into the menu;
4. Press **UP** and **DOWN** button to set the parameter or setting;

5. Press **ENTER** to save the setting;
6. Press **MENU/SET** button to back.

MENU MAP

MAIN MENU		
Rx DMX; T=000C Address= 001		
Transmit T=000C Static Scene		
Transmit T=000C Auto Slip		
Transmit T=000C Auto Skip		
Transmit T=000C Music Trigger		

OPERATION MENU			
Address	Address Setting Addr = 001		
Mode	Mode Setting = DMX		
	Mode Setting = Static Scene		
	Mode Setting = Slip Auto		
	Mode Setting = Skip Auto		
	Mode Setting =		

	Music		
Advanced setup	Setting Scene Led Red	Scene Led Red =000	You must set the value=0 of Macro Color, then setting single scene color
	Setting Scene Led Green	Scene Led Green =000	You must set the value=0 of Macro Color, then setting single scene color
	Setting Scene Led Blue	Scene Led Blue =000	You must set the value=0 of Macro Color, then setting single scene color
	Setting Scene Led White	Scene Led White =000	You must set the value=0 of Macro Color, then setting single scene color
	Setting Macro Define Color	Macro color 00: Disable	
		Macro color 01: Macro = R+G	
		Macro color 02: Macro = R+B	
		Macro color 03: Macro = B+G	
		Macro color 04: Macro = R+W	
		Macro color 05: Macro = G+W	
		Macro color 06: Macro = B+W	

	Skip run speed	Skip run speed = 000	
	Slip run speed	Slip run speed = 000	
	Flash for Scene Auto Music	Flash value = 000	
	Music Sensitivity	Sensitivity = 000	

SETTING DMX 512 MODE

1. Press **ENTER** when the display show the title information;
2. Press **UP/DOWN** to choose the Mode menu, then press ENTER into;
3. Press **UP/DOWN** to choose Mode setting=DMX menu, then press **ENTER** to save;

Ⅵ DMX PROTOCOL

9CH MODE

CH	Name	Value	Function
CH1	General dimmer	000←→004 005←→255	Dimmer off 0-100% linear dimmer all color
CH2	Red	000←→255	Dimmer red
CH3	Green	000←→255	Dimmer green
CH4	Blue	000←→255	Dimmer blue
CH5	White	000←→255	Dimmer white
CH6	Strobe	000←→004 005←→255	No strobe Strobe from slow to fast
CH7	Preset Color	000←→009 010←→026 027←→043	No Function Preset Color 1 Preset Color 2

		044←→060	Preset Color 3
		061←→077	Preset Color 4
		078←→094	Preset Color 5
		095←→111	Preset Color 6
		112←→128	Preset Color 7
		129←→145	Preset Color 8
		146←→162	Preset Color 9
		163←→179	Preset Color 10
		180←→196	Preset Color 11
		197←→213	Preset Color 12
		214←→230	Preset Color 13
		231←→247	Preset Color 14
		248←→255	Preset Color 15
CH8	Macro function	000←→004	No function
		000←→100	Skip
		000←→200	Slip
		000←→255	Audio
CH9	Speed	000←→255	Skip or slip speed

Ⅶ COMMON INSTRUCTION

The light uses international 3/5 pins DMX signal cannon for DMX in and DMX out;

The light uses blue LCD display to show the parameter. If there is no DMX in, the display will shows the information which you can check from the menu map.

In fact, the light has 2 DMX channels modes, please refer the DMX channel chart.

This light uses intelligent full aluminium shell for the heat dissipation, through the electronic

temperature detection ensure the stability of the circuit at any time;

This light is only for indoor use, when you install it by hanging, please use the safety cable to ensure the safety.

If you have any questions, please contact with our sales manager.

Ⅷ TECHNICAL SPECIFICATION

·Input power: AC100~240V, 50/60Hz

·Power consumption: 220W

·Light sources: 200W brand RGBW COB LED Lamps

·LED lifespan: 50,000hours

·Dimmer: 0~100%, 0-15% smoothly dimmer

·Beam angle: 15-60degree

·Color temperature: 3200K-5600K

·Control mode: DMX-512

·DMX channel: 9CH

·Focus: manual focus adjustable

·Light visor: optional

·IP rating: IP20

·Housing material: aluminum alloy

·Working temperature: -25~40centigrad degree

Ⅸ APPENDIX

Problem and solution

Problem	**Reason**	**Resolution**
Device not work	No power	AC100-240V, 50/60Hz

VG-PB200D-D 200W RGBW 4in1 LED Fresnel Spot light User Manual

		Check the power connection, and make sure device connect the mains in well condition. Check if the fuse is good.
LED Bulb is off	LED bulb damaged	Replacing LED bulb
	LED drive board damaged	Replacing LED drive board
	Temperature switch damaged	Replacing temperature switch
Fans not work	Fans damaged	Replacing fans

Caution

- Unqualified person involved with installation, operation and maintenance of this device is prohibited
- If any above mentioned problem happened, or unknown problem happened, please contact manufacturer or distributor for assistance.

Innovation, Quality, Performance, Achieving Users' Value!