

Guangzhou VanGaa Lighting Tech. Co., Ltd
Homepage: www.VanGaa.com
Email: info@vangaa.com
Tel: 0086-20-86432439
Wechat &WhatsApp: 0086 1382 512 8583
Factory add: Building B, Langling Industry Park, Huaxing Industry Area, Xinhua Town, Huadu District, Guangzhou, China

Wechat Facebook Youtube

LED Studio & Theater Lights Catalogue




www.VanGaa.com
VanGaa, focus on high CRI and No/low noise LED Studio Light



Industry Area of VanGaa Lighting Factory



A Corner of Workshop



A Scene of Showroom



A Corner of Technical Department



The Building of Sales Center




The Team of VanGaa



Service Team of Oversea Market



Customers Visit to Our Factory



2019 GET Show in Guangzhou

About us

VanGaa--High CRI and No/low Noise Studio Lights Manufacturer!

Professional LED Studio Light & Stage Light Factory since 2009

Guangzhou VanGaa Lighting Tech. Co., Ltd is an internationally recognized company that focus on energy efficient LED technology for professional studio and stage lighting fixtures. We are involved in the business of lighting fixtures designing, manufacturing, selling, events and project designing, installation, after-sales service and others.

VanGaa Lighting was established in 2006 in Guangzhou, and we have made up our own factory in 2009 which owns three production lines now. We design and developed the professional studio lighting fixtures, such as LED Fresnel Spot Light, LED Profile Spot Light, LED Soft Video Sky Panel Light, and the stage lighting fixtures, such as LED Moving Head Light, LED Par Light, Follow Spot Light etc. Our company incorporates the latest in production processes and quality assurance to ensure that our products meet the highest standards of quality and refinement. Our products comply strictly with ISO9001:2015, ISO14001:2015, ISO45001:2018, CE and RoHS safety standards.

Our company's reputation is founded upon innovative, pragmatic design and manufacture of a focused and professional range of LED studio and stage lights. According to our principle "Achieving Users' Value", we design, manufacture and popularize the quality, professional and practical fixtures for studio and entertainment.

Our Principles
Environmental friendly and Energy frugally, lighting the green world
Supply Reliable Quality Product
Shipping on Time
Offer Professional Technical support
Invest in R&D and stay at the forefront of technology
Rigorously test everything we make
Initiative to communicate with our customers

Innovation, Quality and Performance, We are Achieving Users' Value!
















VanCaa 维嘉影视

Contents

Page 01-12
LED Film Video Sky Panel Light Series

Page 13-30
LED Fresnel Spot Light Series

Page 31-46
LED Ellipsoidal Profile Spotlight Series

Page 47-52
LED Cyclorama Light Series


Page 53-55
HMI Fresnel Spot Light Series

Page 56-59
Control System Series

Page 60
Accessories Series




High Power Colorful LED Video Film Sky Panel Light



Specification	
Product model	Color Panel 1440G-II
Light sources	480pcs 1W RGB 3in1 LEDs+480pcs 0.5W Warm White LEDs+480pcs 0.5W Cold White LEDs
Input power	AC100-240V, 50/60Hz; and DC24-36V
Light output	150W for every color(Red, Green, Blue, Warm White and Cold White)keep similar brightness
CRI	Ra≥95
Color temp.	Kelvin 2500-9900K, DMX and Rotary Knob adjustable
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
Effect	With GEL color change, special effect, RGB color change, and direct white dimmer function
Beam angle	120° (90° /60° honeycomb louver optional)
Cooling system	Copper tube convector, no fan
Control mode	DMX512; RDM; Kelvin Temperature; Hue Angle; Saturation; Wireless Solution Receive
IP rating	IP 20
Accessories	DMX Cable; Power cable
Net weight	7.7kg
Body size	730*153*347mm

Product details












Optional Accessories



Barndoors



Honeycomb Louver



Battery(2h for full brightness)



Snap Grid




Tripod



Carry Bag


Colorful LED Video Film Sky Panel Light



Specification	
Product model	Color Panel 1440G
Light sources	480pcs 0.5W RGB 3in1 LEDs+480pcs 0.5W Warm White LEDs+480pcs 0.5W Cold White LEDs
Input power	AC100-240V, 50/60Hz; and DC24-36V
Light output	150W for white color
CRI	Ra≥95
Color temp.	Kelvin 2500-9900K, DMX and Rotary Knob adjustable
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	7CH(GEL Mode), 7CH(RGB Mode) and 4CH(White Mode)
Beam angle	120° (90° /60° honeycomb louver optional)
Cooling system	Copper tube convector, fanless
Control mode	DMX512; RDM; Kelvin Temperature; Hue Angle; Saturation; Wireless Solution Receive
IP rating	IP 20
Accessories	DMX Cable; Power cable
Net weight	7.5kg
Body size	730*153*347mm

Product details



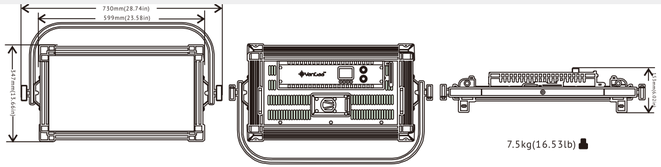

GEL/HUE Mode

7CH	1	2	3	4	5	6	7
%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W	GEL List	Hue angle	Saturation
100% 255			9900K				
0% 0			2500K				


RGB Color Mode

7CH	1	2	3	4	5	6	7
%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W	Red	Green	Blue
100% 255			9900K				
0% 0			2500K				

White Mode

4CH	1	2	3	4
%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W
100% 255			6500K	
0% 0			2500K	

3200K(152W):	2700	805	394	219	146	98	
5600K(158W):	3307	1035	489	295	181	125	
CRI: Ra≥95	Red(55.5W):	270	84	39	24	14	10
	Green(59.9W):	758	222	107	61	42	28
Lux	Blue(61.6W):	197	60	29	17	13	9

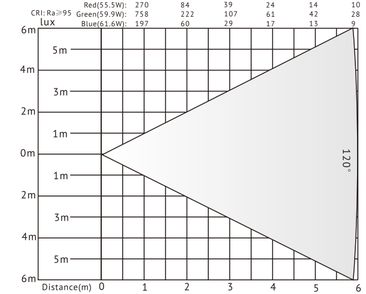

High Power LED Bicolor Video Panel Light



Specification		
Product model	VG-HTC1488C	VG-HTC1400C
Light sources	1488pcs 0.5W high CRI 2835 SMD LEDs	1488pcs 0.5W high CRI 2835 SMD LEDs
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	every color 300W-280W	every color 250W-230W
CRI	Ra≥95; R9≥90, R15≥90	Ra≥95; R9≥90, R15≥90
Color temp.	3000-6000K	3000-6000K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+2 Rotary Knobs	LCD display+2 Rotary Knobs
DMX channel	1CH, 2CH, 3CH	1CH, 2CH, 3CH
Beam angle	120°	120°
Cooling system	radiator+mute fan(within 45db)	radiator(without fan), quite
Control mode	DMX512; RDM; Demo; Manual; Knobs	DMX512; RDM; Demo; Manual; Knobs
IP rating	IP 20	IP 20
Accessories	Barn doors; DMX Cable; Power cable	Barn doors; DMX Cable; Power cable
Net weight	12.3kg	12.3kg
Body size	D640*W98*H425mm	D640*W98*H425mm

Product details



Direct-CH Mode

3CH	1	2	3
%	Dimmer	Warm White	Cold White
100% 255			
0% 0			


Color Temp. CH Mode

2CH	1	2
%	Dimmer	CCT (Kelvin)
100% 255		6000K
0% 0		3000K

Brightness-CH Mode

1CH	1
%	General Dimmer
100% 255	
0% 0	

TLCI: 96; CRI: 97.6Ra	3200K(300W):	10576	3200	1806	1020	451	253lux
TLCI: 98.7; CRI: 97.5Ra	4500K(300W):	11856	3456	1965	1116	491	275lux
TLCI: 97.7; CRI: 97Ra	5600K(300W):	11120	3560	1990	1130	497	279lux

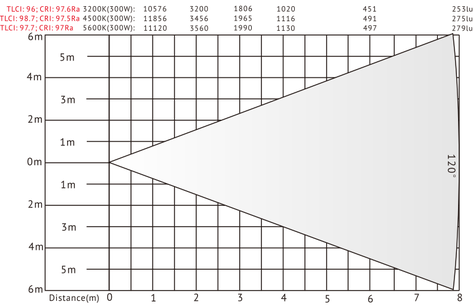

High Power Bicolor LED Video Film Sky Panel Light




Specification	
Product model	VG-HTC2024C
Light sources	1012pcs 0.2W 3200K 2835 SMD LEDs and 1012pcs 0.2W 6500K 2835 SMD LEDs
Input power	AC100-240V, 50/60Hz
Light output	200W-180W
CRI	Ra≥95
Color temp.	3200-6500K, DMX and Rotary Knob adjustable
Dimmer	0-100% linear dimmer
Control panel	LCD touch screen+4 buttons, and 2 rotary knobs
DMX channel	2CH
Beam angle	135°
Cooling system	Copper tube convector, fanless
Control mode	DMX512; RDM; Auto run; Master/slave
IP rating	IP 20
Accessories	DMX Cable; Power cable
Net weight	8.6kg
Body size	727*433*119mm

Product details








8.6kg(18.96lb)

2CH	1	2
%	CCT	Dimmer
100% 255 0	6500K 3200K	





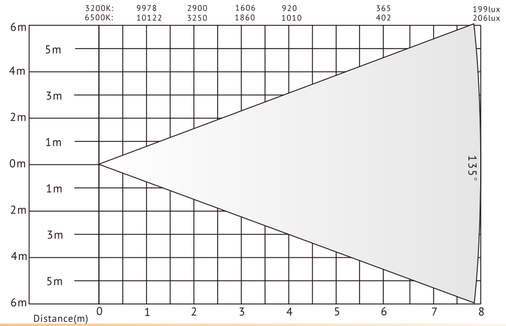


LED Soft Video Sky Panel Light





Specification		
Product model	VG-HTC550C	VG-HTC550
Light sources	1200pcs bi-color 0.5W led lamps	1200pcs 3200K/5600K 0.2W led lamps
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	200-190W	200-190W
CRI	Ra≥95	Ra≥95
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	1CH/2CH
Beam angle	120°	120°
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512, Master/slave, Auto-run	DMX512, Master/slave, Auto-run
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX cable; Power cable	Barndoor; DMX cable; Power cable
Net weight	11kg	11kg
Body size	571*383*137mm	571*383*137mm

Product details










11kg(24.25lb)
























LED Soft Video Sky Panel Light



Specification		
Product model	VG-HTC490C	VG-HTC490
Light sources	1200pcs bi-color 0.2W 2835 SMD LEDs	1200pcs 3200K/5600K 0.2W 2835 SMD LEDs
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	150-130W	150-130W
CRI	Ra≥95	Ra≥95
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	1CH/2CH
Beam angle	120°	120°
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512, Master/slave, Auto-run	DMX512, Master/slave, Auto-run
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX cable; Power cable	Barndoor; DMX cable; Power cable
Net weight	9kg	9kg
Body size	480*270*127mm	480*270*127mm

Product details



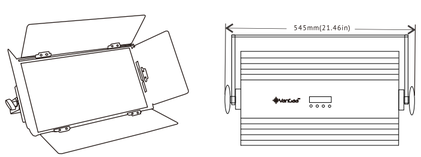

9kg(19.84lb)

VG-HTC490C DMX Channel


4CH	1	2	3	4
%	General Dimmer	Fixed Color Temp.	WW Dimmer	CW Dimmer


VG-HTC490 DMX Channel

1CH	1
%	General Dimmer

2CH	1	2
%	General Dimmer	Strobe








LED Soft Video Sky Panel Light



Specification	
Product model	Bicolor Panel 1440C
Light sources	720pcs 0.2W 3200K warm white LED chips and 720pcs 0.2W 5600K cold white led chips
Input power	AC100-240V, 50/60Hz
Light output	150W
CRI	Ra≥95
Color temp.	3200K-5600K adjustable
Dimmer	0-100% linear dimmer
Control panel	LCD display+2 rotation knobs+4 buttons
DMX channel	4CH
Beam angle	120°
Cooling system	Natural cooling, no fan
Control mode	DMX512, Master/slave, Auto-run
IP rating	IP 20
Accessories	Barndoor; DMX cable; Power cable
Net weight	7.7kg
Body size	730*153*347mm


Product details



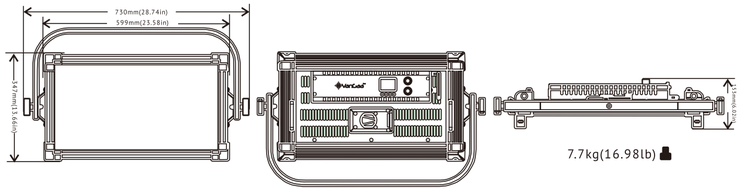


7.7kg(16.98lb)

4CH	1	2	3	4
%	General Dimmer	Fixed Color Temp.	WW Dimmer	CW Dimmer

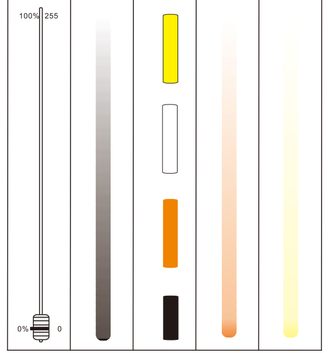

LED Soft Video Sky Panel Light



Specification		
Product model	VG-HTC1480C	VG-HTC1480
Light sources	448pcs 0.5W 5730 SMD bicolor LEDs	448pcs 0.5W 5730 SMD 3200K/5600K LEDs
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	140-120W	140-120W
CRI	Ra≥95	Ra≥95
Color temp.	3200K-6000K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons, 2 rotary knobs	LCD display+4 buttons
DMX channel	3CH	1CH
Beam angle	130°	130°
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512, Master/slave, Auto-run	DMX512, Master/slave, Auto-run
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX cable; Power cable	Barndoor; DMX cable; Power cable
Net weight	8.5kg	8.5kg
Body size	D484*W75*H294mm	D484*W75*H294mm

Product details



VG-HTC1480C DMX Channel

3CH	1	2	3
%	General Dimmer	CW Dimmer	WW Dimmer

VG-HTC1480 DMX Channel

1CH	1
%	General Dimmer




LED Soft Video Sky Panel Light



Specification		
Product model	VG-HTC1200C-N	VG-HTC630-N
Light sources	1200pcs 0.2W High CRI LED chips	630pcs 0.2W 3200K/5600K High CRI LED chips
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	110W	110W
CRI	Ra≥95	Ra≥95
Color temp.	3200K-5600K adjustable	3200K/5600K adjustable
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	1CH/1CH
Beam angle	120°	120°
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	6.5kg	6.5kg
Body size	570*265*109mm	570*265*109mm

Product details



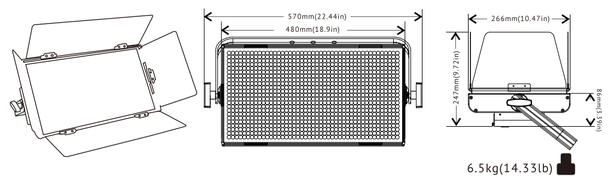

VG-HTC1200C-N DMX Channel


4CH	1	2	3	4
%	General Dimmer	Fixed Color Temp	WW Dimmer	CW Dimmer

VG-HTC630-N DMX Channel

1CH	1
%	General Dimmer

2CH	1	2
%	General Dimmer	Strobe



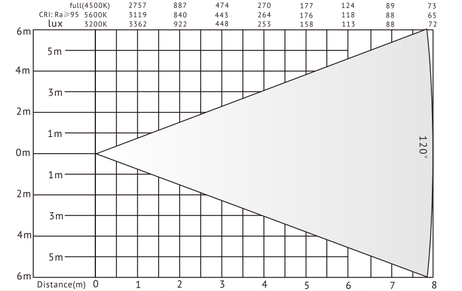


LED Soft Video Sky Panel Light




Specification		
Product model	VG-HTC1200C	VG-HTC630
Light sources	1200pcs 0.2W high CRI LED	630pcs 0.2W high CRI LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	110-100W	110-100W
CRI	Ra≥95	Ra≥95
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	1CH/2CH
Beam angle	120°	120°
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable
Net weight	5.5kg	5.5kg
Body size	570*265*109mm	570*265*109mm


Product details








VG-HTC1200C DMX Channel





VG-HTC630 DMX Channel












LED Soft Video Sky Panel Light




Specification		
Product model	VG-HTC1380C	VG-HTC1380
Light sources	224pcs 0.5W 5730SMD bicolor LED lamps	224pcs 0.5W 5730SMD 3200K/5600K LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	80-70W	80-70W
CRI	Ra≥92	Ra≥92
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	1CH
Beam angle	120°	120°
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable
Net weight	5.5kg	5.5kg
Body size	394*352*75mm	394*352*75mm

Product details





VG-HTC1380C DMX Channel



VG-HTC1380 DMX Channel








Fanless LED Fresnel Spot Light



Specification	
Product model	VG-DL400G-fanless
Light sources	1pc 400W RGBAL 5in1 colorful COB LED lamp
Input power	AC100-240V, 50/60Hz
Light output	200-190W
CRI of white	Ra≥92
Color	RGBAL color mixing
Dimmer	0-100% linear dimmer
Control panel	LCD display + 2 rotating knob
DMX channel	7CH, 11CH
Beam angle	15-60°
Cooling system	Natural cooling, no fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barndoor; DMX and Power cable
Net weight	12kg
Body size	D446*W394*H437mm


Product details




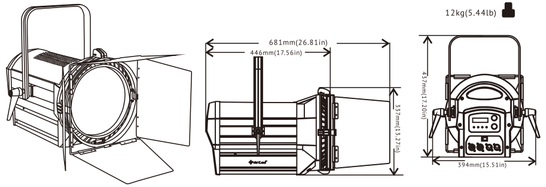

7CH	1	2	3	4	5	6	7
%	Dimmer	Red dimmer	Green dimmer	Blue dimmer	Amber dimmer	Lemon dimmer	Zoom
100% 255 0% 0							60° 15°

11CH	1	2	3	4	5	6	7	8	9	10	11
%	Dimmer	Red dimmer	Green dimmer	Blue dimmer	Amber dimmer	Lemon dimmer	Zoom	Strobe	Macro Color	Function	Speed
100% 255 0% 0							60° 15°	0 1-7 8-13 14-19 20-25 26-31 32-37 38-43 44-49 50-55 56-61 62-67 68-73 74-79 80-85 86-91 92-97 98-103 104-109 110-115 116-121 122-127 128-133 134-139 140-145 146-151 152-157 158-163 164-169 170-175 176-181 182-187 188-193 194-199 200-205 206-211 212-217 218-223 224-229 230-235 236-241 242-247 248-255 strobe slow→fast		Color Change Color Fade Gradual	






High Power Fanless Motorized LED Fresnel Spot Light



Specification		
Product model	VG-DL200W-C-fanless	VG-DL200W-fanless
Light sources	1pc 200W bicolor COB LED	1pc 200W 3200K/5600K COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	Max 200W, 3200k/5600K 100W	Max 200W
CRI	Ra≥95	Ra≥95
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display + 2 rotating knobs	LCD display + 2 rotating knobs
DMX channel	4CH/5CH	2CH
Beam angle	120°	120°
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable
Net weight	12kg	12kg
Body size	D446*W394*H437mm	D446*W394*H437mm

Product details



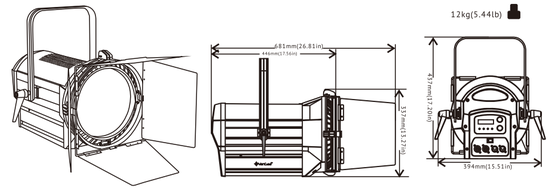

4CH	1	2	3	4
%	Dimmer	WW dimmer	CW dimmer	Zoom
100% 255 0% 0				60° 15°

2CH	1	2
%	Dimmer	Zoom
100% 255 0% 0		60° 15°






Fanless LED Fresnel Spot Light




Specification	
Product model	VG-PB100W-fanless
Light sources	1pc 100W 3200K/5600K COB LED lamp
Input power	AC100-240V, 50/60Hz
Light output	100W
CRI of white	Ra≥95
Color temperature	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display + 4 buttons
DMX channel	1CH, 2CH
Beam angle	15-60°
Cooling system	Natural cooling, no fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barndoor; DMX and Power cable
Net weight	7kg
Body size	D455*W265*H292mm


Product details



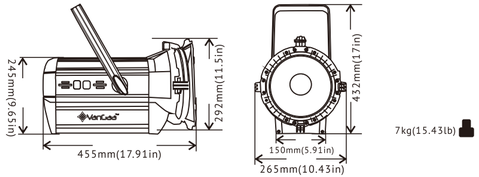





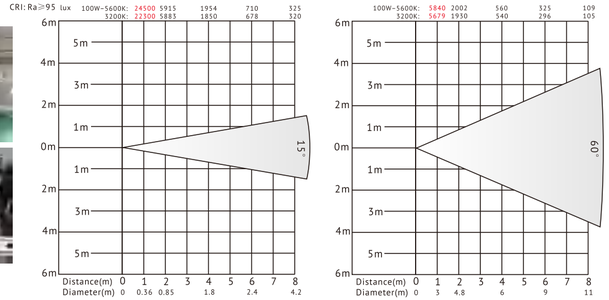

Features

- Equips with 100W branded high CRI high brightness LED chips, small size, suitable for small space studio room;
- Use large copper tube radiator as the main parts of cooling system, no fan inside the light which can make sure the light is silent. This light can be used for the scene which has very strict requirement of noise;
- Use screw to adjust the different beam angle from spot(15°) to flood(60°), manual, or motorized/DMX signal to control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is uniquely developed by VanGaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Application



Effect



Manufacturing



Package




Motorized Zoom LED Fresnel Daylight




Specification		
Product model	VG-DL450/VG-DL550	VG-DL450-C
Light sources	400W/500W high CRI COB LED lamp	400W high CRI COB LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/550W	450W
CRI	Ra≥95, or Ra≥97	Ra≥95, or Ra≥97
Color temp.	3200K/5600K	3200K-5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH, 4CH, 5CH, 14CH	4CH, 5CH, 6CH, 15CH
Beam angle	15-60° ,motorized zoom	15-60° ,motorized zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	12kg	12kg
Body size	450*394*337mm	450*394*337mm

Product details







Brightness Mode


3CH	1	2	3
%	Dimmer	Strobe	Zoom


CTO Mode

4CH	1	2	3	4
%	Dimmer	CTO	Strobe	Zoom

Direct Mode

5CH	1	2	3	4	5
%	Dimmer	Warm White	Cold White	Strobe	Zoom





Features

- Equips with 400W/500W branded high CRI high brightness LED chips, enough power for big space studio room;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suits the international studio room environment standard;
- 400W bi-color led chip is optional, make sure 3200K, 5600K, 4500K and other different color temperature output keep at 200W, ensuring good brightness;
- Intelligent control software has been used for this light. The light can controlled by DMX signal, and also can control color temperature and dimmer by rotary knobs;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Application



Install Methods





Effect



60 degree　　15 degree

Package





Bi-color LED Fresnel Spot Light





Specification	
Product model	VG-PB200W-C/VG-PB200W-C-D/VG-PB400W-C/VG-PB400W-C-D
Light sources	200W/400W bi-color high CRI COB LED lamp
Input power	AC100-240V, 50/60Hz
Power	250W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K-5600K every color 100W(PB200W)/3200K-5600K every color 200W(PB400W)
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	5CH, 6CH
Beam angle	15-60° , manual zoom or motorized zoom
Cooling system	Copper tube convector
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm

Product details








VG-PB200W-C DMX Channel


5CH	1	2	3	4	5
%	General Dimmer	Fixed Color Temp.	WW Dimmer	CW Dimmer	Strobe

VG-PB200W-C-D DMX Channel

6CH	1	2	3	4	5	6
%	General Dimmer	Fixed Color Temp.	WW Dimmer	CW Dimmer	Strobe	Zoom






Features

- Equips with 200W/400W bicolor branded high CRI high brightness LED chips, different power optional; The light output can keep at 100W or 200W at different color temperature;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suits the international studio room environment standard;
- Use screw to adjust the different beam angle from spot(15°) to flood(60°), manual, motorized/DMX signal control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is uniquely developed by VanGaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Application




Effect




Manufacturing





Package







Motorize Zoom LED Fresnel Spot Light




Specification	
Product model	VG-PL250W-C-O
Light sources	1pc 500W bicolor COB LED lamp
Input power	AC100-240V, 50/60Hz
Power	300W
CRI	Ra≥95
Color temp.	3200-5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	5CH
Beam angle	15-55°, motorized&manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8.4kg
Body size	D486*W250*H276mm

Product details




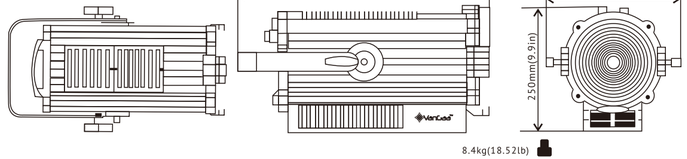


5CH	1	2	3	4	5
%	Zoom	Strobe	Warm White	Cold White	Dimmer










Motorized Zoom LED Fresnel Spot Light




Specification	
Product model	VG-PB200W-D/VG-PB100W-D
Light sources	200W/100W high CRI COB LED lamp
Input power	AC100-240V, 50/60Hz
Power	200W/100W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	3CH
Beam angle	15-60°, motorized&manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm

Product details

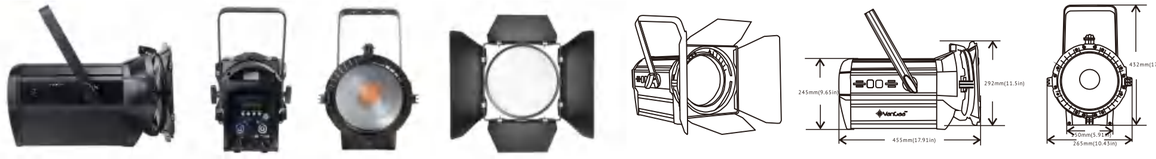



Motorize Style DMX Channel

3CH	1	2	3
%	Dimmer	Zoom	Strobe










Manual Zoom LED Fresnel Spot Light




Specification	
Product model	VG-PB200W/VG-PB100W
Light sources	200W/100W high CRI COB LED lamp
Input power	AC100-240V, 50/60Hz
Power	200W/100W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	1CH, 2CH
Beam angle	15-60° , manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm

Product details








Manual zoom Style DMX Channel




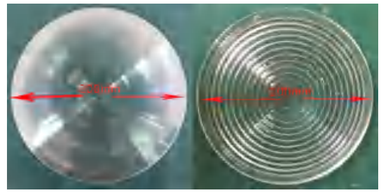


different style fresnel lens optional









Features


- Equips with 100W/200W/300W branded high CRI high brightness LED chips, different powers optional;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suits the international studio room environment standard;
- Use screw to adjust the different beam angle from spot(15°) to flood(60°), motorized/DMX signal control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is uniquely developed by VanGaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.


Application



Effect











Manufacturing















Package










400W LED Fresnel Spot Light




Specification		
Product model	VG-PL400G	VG-PL400W
Light sources	400W RGBAL 5in1 LED lamp	400W high CRI COB LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W	450W
CRI	/	Ra≥92, or Ra≥95
Color	RGBAL 5in1 color mixing	3200K/5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	12CH	4CH
Beam angle	15-65°, manual zoom	15-65°, manual zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	13kg	13kg
Body size	407*337*312mm	407*337*312mm


Product details









12CH	1	2	3	4	5	6	7	8	9	10	11	12
%	Red dimmer	Green dimmer	Blue dimmer	Amber dimmer	Lemon dimmer	Macro Color	Color Tempe.	Function	Strobe	4 Dim	Dimmer	Dim Fine

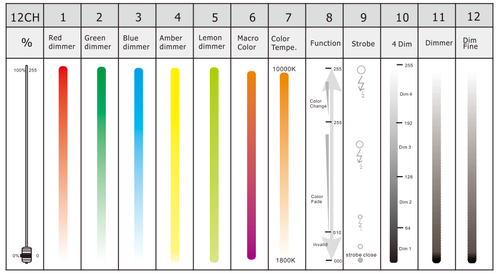





Color Correction 200W LED Fresnel Spot Light




Specification		
Product model	VG-PL250D	VG-PL250W
Light sources	200W RGBW 4in1 LED lamp	200W high CRI COB LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	250W	250W
CRI	/	Ra≥92
Color temp.	RGBW color mixing	3200K/5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	11CH	4CH
Beam angle	15-65° , manual zoom	15-65degree, manual zoom
Cooling system	Copper tube convector	Copper tube convector
Control mode	RDM, DMX512, Color correction	RDM, DMX512, Color correction
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	7kg	6.5kg
Body size	546*346*270mm	546*346*270mm

Product details






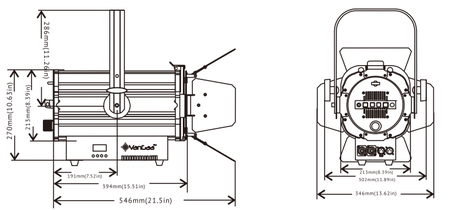


VG-PL250D DMX Channel


11CH	1	2	3	4	5	6	7	8	9	10	11
%	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Macro Color	Color Tempe.	Function	Strobe	4 Dim	Dimmer	Dim Fine

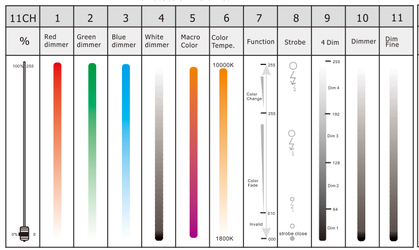

VG-PL250W DMX Channel

4CH	1	2	3	4
%	Dimmer	Dim Fine	Strobe	Dim 4



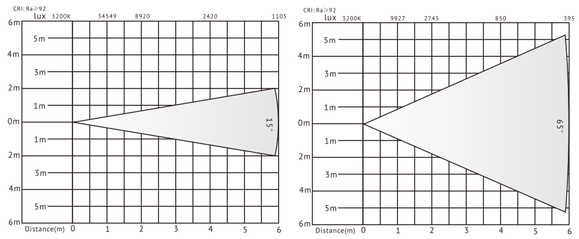

Manual Zoom LED Fresnel Spot Light



Specification	
Product model	VG-PB200D
Light sources	200W RGBW 4in1 COB LED lamp
Input power	AC100-240V, 50/60Hz
Power	220W
CRI	/
Color	RGBW 4in1 color mixing
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	9CH
Beam angle	15-60° ,manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8kg
Body size	455*265*292mm


Product details

















9CH	1	2	3	4	5	6	7	8	9
%	General dimmer	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Strobe	Preset color	Macro function	Speed

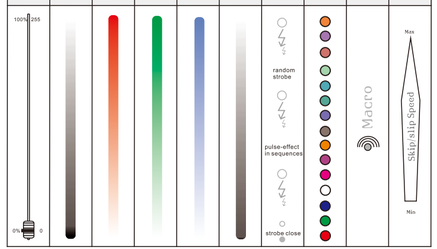

100W Zoom LED Fresnel Spot Light




Specification		
Product model	VG-PL100G	VG-PL100W
Light sources	100W RGBAL 5in1 COB LED lamp	100W 3200K/5600K COB LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	100W	100W
CRI	/	92Ra
Color	RGBAL 5in1 color mixing	3200K warm white/5600K cold white
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	12CH, 6CH	4CH, 1CH
Beam angle	20-38° ,manual zoom	20-38° ,manual zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	4kg	4kg
Body size	558*224*166mm	558*224*166mm


Product details
















4kg(8.82lb)

VG-PL100G DMX Channel

12CH	1	2	3	4	5	6	7	8	9	10	11	12
%	Red dimmer	Green dimmer	Blue dimmer	Amber dimmer	Lemon dimmer	Macro Color	Color Tempe.	Function	Strobe	4 Dim	Dimmer	Dim Fine

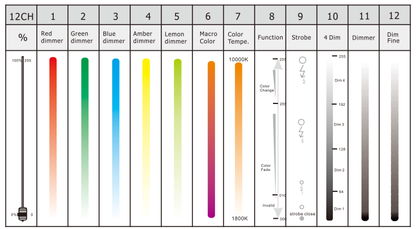


6CH	1	2	3	4	5	6
%	Hue	Saturation	Intensity	Intensity fine	CCT	Strobe




VG-PL100W DMX Channel


4CH	1	2	3	4
%	Dimmer	Dim Fine	4 Dim	Strobe



1CH	1
%	Dimmer







Manual Zoom LED Fresnel Spot Light



DMX 512 | 16 bit | Quick-FIX System | CE | RoHS

LED Fresnel Spot Light Series


Specification		
Product mode	VG-PL60W	VG-PL60D
Light sources	1pc 60W COB LED	1pc 60W RGBW 4in1 LED
Input power	AC100-240V,50/60Hz	AC100-240V,50/60Hz
Power	65W	65W
CRI	Ra≥90	–
Color temp.	3200K/5600K	–
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	1CH;3CH	8CH
Beam angle	35-50° , manual	15-45° , manual
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX-512; Auto run	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power and signal cable	Barn doors, power cable, signal cable
Net weight	2.5kg	2.5kg
Body size	D248*W196*H136mm	D248*W196*H136mm


Product details














1CH	1
%	Dimmer




8CH	1	2	3	4	5	6	7	8
%	General dimmer	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Color temperature	Strobe	Speed

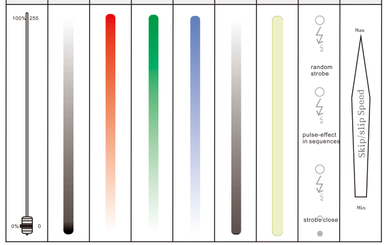



2.5kg(5.51lb)



50W Mini LED Fresnel Spot Light



3 YEARS WARRANTY | DMX 512 | 16 bit | Quick-FIX System | CE | RoHS

LED Fresnel Spot Light Series

Specification		
Product mode	VG-PL50W	VG-PL50D
Light sources	1pc 50W warm/cold white LED	1pc 50W RGBW 4in1 LED
Input power	AC100-240V,50/60Hz	AC100-240V,50/60Hz
Power	65W	65W
CRI	Ra≥92	–
Color temp.	3200K/5600K	–
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	2CH	5CH
Beam angle	15-45° , manual	15-45° , manual
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power and signal cable	Barn doors, power cable, signal cable
Net weight	1.8kg	1.8kg
Body size	D305*W158*H125mm	D305*W158*H125mm


Product details




















1.8kg(3.97lb)

2CH	1	2
%	Dimmer	Strobe









LED Ellipsoidal Spotlight





Specification			
Product model	VanGaa ERS300A	VanGaa ERS200A	VanGaa ERS200A
Light sources	High CRI 300W COB LED	High CRI 200W COB LED	High CRI 200W COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	350W	250W	250W
CRI	Ra≥95 optional	Ra≥95 optional	Ra≥95 optional
Color	3200K/5600K optional	3200K/5600K optional	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	1CH	1CH	1CH
Beam angle	19/26/36/50° optional	19/26/36/50° optional	19/26/36/50° optional
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
Housing materials	die-casting aluminum	die-casting aluminum	die-casting aluminum
Accessories	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable
Net weight	10kg	10kg	10kg
Body size	690*260*429mm	690*260*429mm	690*260*429mm


Product details













Features

- Branded 300W/200W/100W 3200K/5600K LED chips equipped for this new designed LED profile spotlight, you can get very wonderful gold white or cold white color;
- The light uses not only DMX 512 signal to control, but also the RDM technology. You can set the ID address and check the using situation on console easily;
- All the light will use the color correction test device to test, to make sure every color value is the same although manufactured in different times;
- 3200K/5600K color temperature adjustable by DMX signal;
- 19, 26, 36, 50 degrees different beam angles optional;
- 24khz dimmer software, 0-100% linear dimmer.

Application



Effect






Manufacturing in Workshop












Fixed Lens LED Ellipsoidal Spotlight





Specification		
Product model	VG-LVF400A/VG-LVF220A	VG-LVF400G/VG-LVF220G
Light sources	400W/200W high CRI COB LED lamp	400W/200W RGBAL 5in1 LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/250W	450W/250W
CRI	Ra≥92	/
Color temp.	3200K/5600K optional	RGBAL 5in1 color mixing
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH	12CH, 5/11CH
Beam angle	19/26/36/50 °	19/26/36/50 °
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	RDM, DMX512, Color correction	RDM, DMX512, Color correction
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	11kg/10kg	11kg/10kg
Body size	589*302*265mm	589*302*265mm

Product details

























Features

- Branded 400W/200W RGBAL 5in1 LED chips equipped for this new designed LED profile spotlight, 5in1 RGB+Amber+Lemon can mix and obtain billions of different colors;
- The light uses not only DMX 512 signal to control, but also the RDM technology. You can set the ID address and check the using situation on console easily;
- All the light will use the color correction test device to test, to make sure every color value is the same although manufactured in different time;
- 1800K-10000K color temperature adjustable by DMX signal;
- 19, 26, 36, 50 degrees different beam angles optional;
- 4 speed dimmer curves, 0-100% linear dimmer.

Application



Effect



Manufacturing, Package & Event



ABS Housing LED Ellipsoidal Spotlight



ETC Source Four Lens | RGBW | DMX 512 | 16 bit | Isolated Output | CE | RoHS

Specification			
Product model	VG-LVF200A	VG-LVF200B	VG-LVF200C
Light sources	High CRI 200W COB LED	High CRI 200W COB LED	High CRI 200W COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	250W	250W	250W
CRI	Ra≥85/Ra≥95 optional	Ra≥85/Ra≥95 optional	Ra≥85/Ra≥95 optional
Color	3200K/5600K optional	3000-6700K adjustable	RGBW 4in1
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	2CH	3CH	9CH
Beam angle	19/26/36/50° optional	19/26/36/50° optional	19/26/36/50° optional
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable
Net weight	6.4kg	6.4kg	6.4kg
Body size	660*360*465mm	660*360*465mm	660*360*465mm


Product details


















VG-LVF200A DMX Channel




VG-LVF200B DMX Channel









Features

- Equips with ETC style high precision glass lens group, which make the light output clear and uniform. The light can cut sharp margin spot or misty margin spot;
- Use high brightness high CRI branded LED chips as the light source, the light has very good output lux;
- Choose ABS as the housing material, the light is very light, not heavy for installation;
- 3200K, 5600K, Bicolor, or RGBW 4in1 different colors are optional for different scenes;
- High CRI can reach 92Ra, 97Ra are optional;
- 19, 26, 36, 50 degrees different beam angles optional;
- Very good cooling system, silent and powerful.

Application



Accessories



gobo holder



color paper frame



iris


Effect















Manufacturing & Package














200W LED Profile Spotlight



Specification			
Product model	VG-LVF210A	VG-LVF210B	VG-LVF210C
Light sources	200W high CRI COB LED lamp	200W bi-color LED lamp	200W RGBW 4in1 COB LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W	200W
CRI	Ra≥92	Ra≥92	/
Color temp.	3200K/5600K optional	3200K-5600K bi color	/
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	5CH	9CH
Beam angle	19/26/36/50°	19/26/36/50°	19/26/36/50°
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512, Color correction	DMX512, Color correction	DMX512, Color correction
IP rating	IP 20	IP 20	IP 20
Accessories	DMX Cable; Power cable	DMX Cable; Power cable	DMX Cable; Power cable
Net weight	8kg	8kg	8kg
Body size	648*194*194mm	648*194*194mm	648*194*194mm

Product details



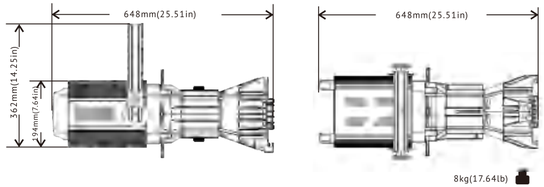

VG-LVF210A DMX Channel

3CH	1	2	3
%	Dimmer	Strobe	4 Dim

VG-LVF210C DMX Channel

9CH	1	2	3	4	5	6	7	8	9
%	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Color	Function	Strobe	Dim 4	Dimmer





50W Mini LED Profile Spot Light




Specification			
Product mode	VG-LVF50A-3200K	VG-LVF50A-5600K	VG-LVF50D
Light sources	1pc 50W warm white LED	1pc50W cold white led	1pc 50W RGBW 4in1 led
Input power	AC100-240V,50/60Hz	AC100-240V,50/60Hz	AC100-240V,50/60Hz
Related power	65W	65W	65W
CRI	Ra≥93	Ra≥93	-
Color temp.	3200K	5600K	-
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	digital tube+4 buttons	digital tube+4 buttons	digital tube+4 buttons
DMX channel	3CH	3CH	5CH
Beam angle	19/26/36/50degree optional	19/26/36/50degree optional	19/26/36/50degree optional
Cooling system	Copper tube convector+fan	Copper tube convector+fan	Copper tube convector+fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Gobo frame, power and signal cable	Gobo frame, power cable, signal cable	Gobo frame, power cable, signal cable
Net weight	1.8kg	1.8kg	1.8kg
Body size	D305 *W158 *H161mm	D305 *W158 *H161mm	D305 *W158 *H161mm

Product details














3CH	1	2	3
%	Dimmer	Strobe	Function

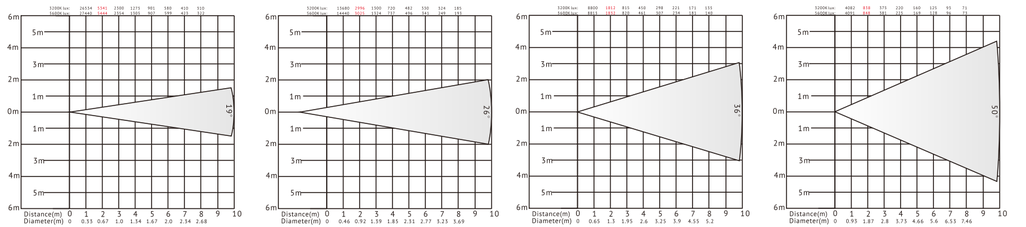

LED Profile Spotlight




RDM DMX 512 16 bit DIM 4 Dimming Curves RS485 DMX Port CE RoHS

Specification

Product model	VG-LVF150A	VG-LVF150C
Light sources	180W high CRI COB LED lamp	180W RGBW 4in1 LED lamp
Input power	AC100~240V, 50/60Hz	AC100~240V, 50/60Hz
Light output	180W	180W
CRI	Ra≥92	/
Color temp.	3200K/5600K optional	RGBW 4in1 color mixing
Dimmer	0~100% linear dimmer	0~100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	9CH
Beam angle	19/26/36/50 °	19/26/36/50 °
Cooling system	Copper tube convector	Copper tube convector
Control mode	DMX512, manual	DMX512, manual
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	7.5kg	7.5kg
Body size	645*260*250mm	645*260*250mm

Product details



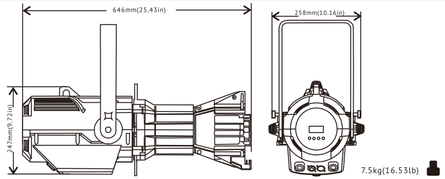


VG-LVF150A DMX Channel

3CH	1	2	3
%	Dimmer	Strobe	4 Dim

VG-LVF150C DMX Channel

9CH	1	2	3	4	5	6	7	8	9
%	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Color Tempe.	Strobe	Dimmer	Rainbow Effect	Demo



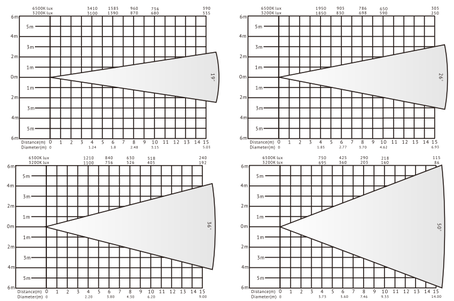

Features

- Equips with high precision acrylic lens group, which make the light output soft and uniform. The light cut sharp margin spot or misty margin spot;
- Use high brightness high CRI branded LED chips as the light source, the light has very good output lux;
- Choose ABS as the housing material, the light is very light, not heavy for installation;
- 3200K, 5600K, Bicolor, or RGBW 4in1 different colors are optional for different scenes;
- High CRI can reach 92Ra, flicker free, suitable for video or photo taking;
- 19, 26, 36, 50 degrees different beam angles optional;
- Very good cooling system, silent and powerful.

Application



Accessories



gobo holder



color paper frame




iris

Effect














Manufacturing & Package














Zoom Lens LED Ellipsoidal Spotlight





Specification		
Product model	VG-LVF400Z-G-D/VG-LVF200Z-G-D	VG-LVF400Z-G/VG-LVF400Z/VG-LVF220Z-G
Light sources	400W/200W RGBAL high CRI COB LED lamp	400W RGBAL 5in1/3200K/5600K/200W RGBAL 5in1 LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/250W	450W/250W
CRI	Ra≥92	Ra≥92
Color temp.	1800-10000K	1800-10000K/3200K/5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	16CH	12CH, 6CH/4CH/12CH, 6CH
Beam angle	19-50°, motorized zoom	19-50°, manual zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	RDM, DMX512, Color correction	RDM, DMX512, Color correction
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	13.5kg/12kg	13.5kg/12kg
Body size	648*340*213mm	648*340*213mm

Product details









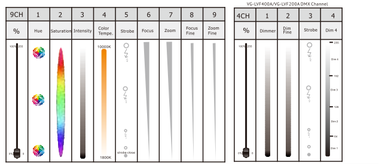



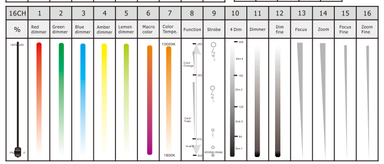



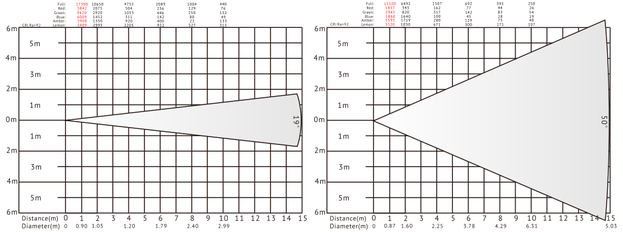


Features

- Branded 400W/200W RGBAL 5in1 LED chips equipped for this new designed LED profile spotlight, 5in1 RGB+Amber+Lemon can mix and obtain billions of different colors;
- The light uses not only DMX 512 signal to control, but also the RDM technology. You can set the ID address and check the using situation on console easily;
- All the light will use the color correction test device to test, to make sure every color value is the same although manufactured in different times;
- 1800K-10000K color temperature adjustable by DMX signal;
- Motorized adjust to control the slice which can realize cut different shape by DMX signal remotely;
- 19-50° beam angle adjustable by manual, or by motorized;
- 4 speed dimmer curves, 0-100% linear dimmer.

Application



Effect

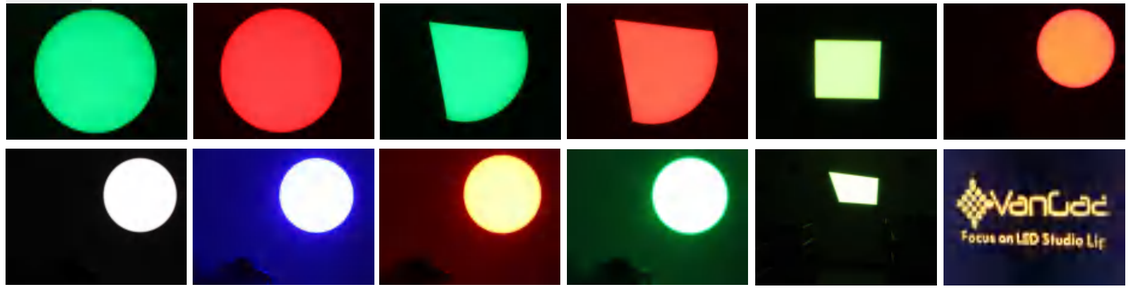

Manufacturing, Package & Event




Zoom Lens LED Ellipsoidal Spotlight



Specification			
Product model	VG-LVF300Z	VG-LVF200Z	VG-LVF200Z-B
Light sources	300W high CRI COB LED lamp	200W high CRI COB LED lamp	200W high CRI COB LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	350W	250W	250W
CRI	Ra≥92	Ra≥92	Ra≥92
Color temp.	3200K/5600K optional	3200K/5600K optional	3200K-5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	3CH	5CH
Beam angle	17-50°	17-50°	17-50°
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512, Color correction	DMX512, Color correction	DMX512, Color correction
IP rating	IP 20	IP 20	IP 20
Accessories	DMX Cable; Power cable	DMX Cable; Power cable	DMX Cable; Power cable
Net weight	10.5kg	10kg	10kg
Body size	618*194*200mm	618*194*200mm	618*194*200mm

Product details





VG-LVF300Z/VG-LVF200Z DMX Channel


3CH	1	2	3
%	Dimmer	Strobe	4 Dim


VG-LVF160Z-B DMX Channel

5CH	1	2	3	4	5
%	General Dimmer	Fixed Color Temp.	WW Dimmer	CW Dimmer	Strobe










Features

- 200W, 300W different power led chips are optional for this light; Bi-color 200W is optional;
- This light is stable performance and very cost performance;
- Manually control the slices and easily cut different shape of light;
- 17-50 degrees beam angles adjustable by manual, with manual focus function;
- 4 speed dimmer curves, 0-100% linear dimmer.

Application



Effect & Manufacturing

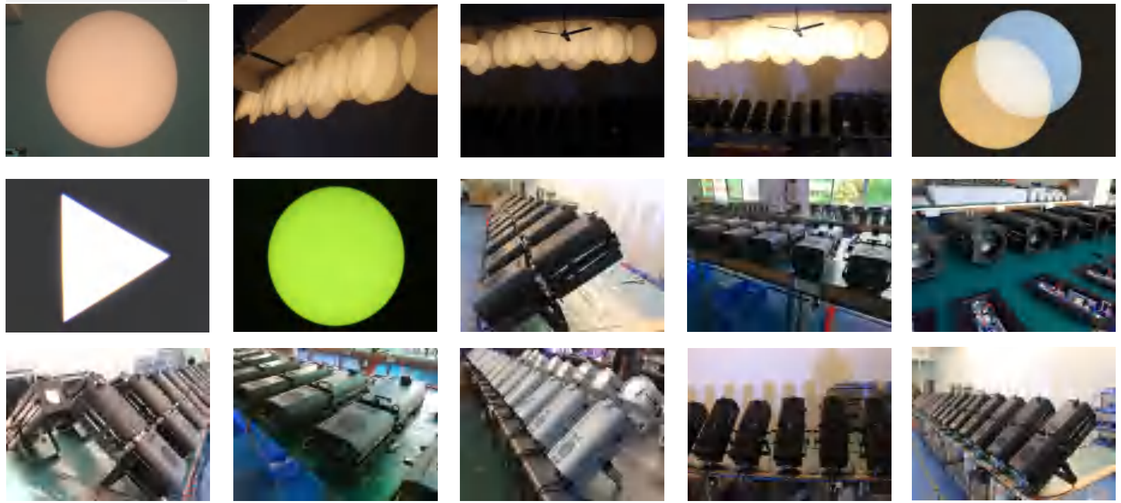


Zoom Lens LED Ellipsoidal Spotlight





Specification		
Product model	VG-LVF100Z-G	VG-LVF100Z
Light sources	100W RGBAL 5in1 COB LED	100W 3200K/5600K COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	150W	150W
CRI	Ra≥92	Ra≥92
Color temp.	1800-10000K	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	12CH, 6CH	4CH, 1CH
Beam angle	17-50°	17-50°
Cooling system	Copper tube convector	Copper tube convector
Control mode	DMX512, Color correction	DMX512, Color correction
IP rating	IP 20	IP 20
Accessories	DMX Cable; Power cable	DMX Cable; Power cable
Net weight	5kg	5kg
Body size	594*224*140mm	594*224*140mm


Product details









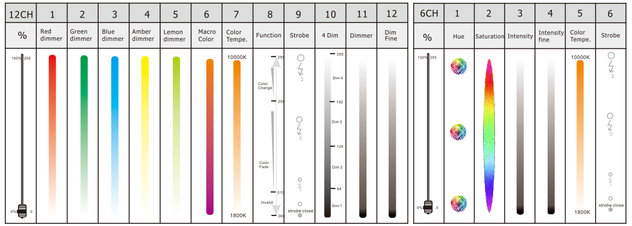

60W LED Profile Spot Light



Specification			
Product model	VG-LLK60Z-A	VG-LLK60Z-B	VG-LLK60Z-C
Light sources	60W 3200K/5600K COB LED	60W bicolor COB LED	60W RGBW 4in1 COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	60W	60W	60W
CRI	Ra≥95	Ra≥95	/
Color	3200K/5600K optional	3200-5600K optional	3200-5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	OLED display+4 buttons	OLED display+4 buttons	OLED display+4 buttons
DMX channel	4CH, 1CH	5CH	9CH
Beam angle	25-50°, manual zoom	25-50°, manual zoom	25-50°, manual zoom
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable
Net weight	3.2kg	3.2kg	3.2kg
Body size	417*117*155mm	417*117*155mm	417*117*155mm

60W LED Profile Spot Light



Specification			
Product model	VG-LVF100Z-A	VG-LVF60Z-A	VG-LLK60Z-C
Light sources	100W 3200K/5600K COB LED	60W 3200K/5600K COB LED	60W RGBW 4in1 COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Light output	100W	60W	60W
CRI	Ra≥92	Ra≥92	/
Color	3200K/5600K optional	3200K/5600K optional	RGBW 4in1 color mixing
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	digital tube+4 buttons	digital tube+4 buttons	digital tube+4 buttons
DMX channel	1CH	1CH	6CH
Beam angle	19-30°, manual zoom	19-30°, manual zoom	19-30°, manual zoom
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable
Net weight	2.6kg	2.6kg	2.6kg
Body size	390*190*135mm	390*190*135mm	390*190*135mm

Color Correction 400W LED Cyclorama Light



RDM Bi-color DMX 512 16 bit QUALIFIED TX FTM CE ROHS

LED Cyclorama Light Series


Specification	
Product model	VG-LB2600
Light sources	200pcs seven colors branded led lamps, (R:48; G:32; B:24; Royal blue: 16; Cyan: 16; Amber: 24; Lime green: 40)
Input power	AC100-240V, 50/60Hz
Power	400W
CRI	Ra≥97
Color quality	>90, from 2700K-8000K
Color range	>1670 thousands colors
Color mixing system	HSIC(brightness/hue/saturability/color temperature)
Control panel	LCD display+4 buttons
DMX channel	7CH/9CH/11CH/15CH/17CH/22CH
Cooling system	mute fan
Beam angle	30° for first head, 80° for second head
IP rating	IP 20
Accessories	Barndoor; DMX cable; Power cable
Net weight	15kg
Body size	D617*W310*H328mm


Product details

















7CH	1	2	3	4	5	6	7
%	Intensity	Hue	Hue fine	Saturation	Color Tempe.	Strobe	Dimmer Speed



11CH	1	2	3	4	5	6	7	8	9	10	11
%	Dimmer	Red dimmer	Green dimmer	Blue dimmer	Lemon dimmer	Amber dimmer	Cyan dimmer	Deep blue dimmer	Preset Color	Strobe	Dimmer Speed



There are HSIC 7CH, SSP 11CH, TOUR 14CH, TOUR 22CH, PIXEL 9CH, PIXEL 17CH options

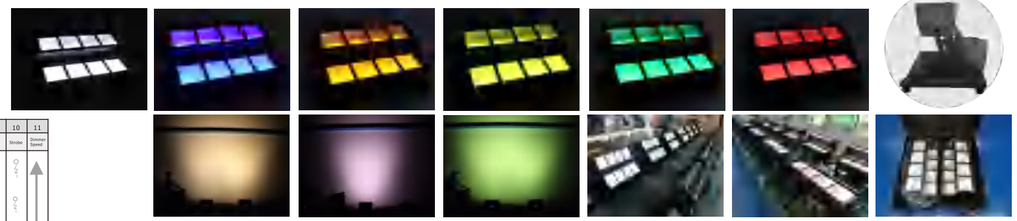

Color Correction 200W LED Cyclorama Light



RDM Bi-color DMX 512 16 bit QUALIFIED TX FTM CE ROHS

LED Cyclorama Light Series

Specification	
Product model	VG-LB2400
Light sources	100pcs seven colors branded LED lamps, (R:24; G:16; B:12; Royal blue: 8; Cyan: 8; Amber: 12; Lime green: 20)
Input power	AC100-240V, 50/60Hz
Power	200W
CRI	Ra≥97
Color quality	>90, from 2700K-8000K
Color range	>1670 thousands colors
Color mixing system	HSIC(brightness/hue/saturability/color temperature)
Control panel	LCD display+4 buttons
DMX channel	7CH/9CH/11CH/15CH/17CH/22CH
Cooling system	mute fan
Beam angle	30° for first head, 80° for second head
IP rating	IP 20
Accessories	Barndoor; DMX cable; Power cable
Net weight	7.5kg
Body size	D510*W285*H261mm


Product details















7CH	1	2	3	4	5	6	7
%	Intensity	Hue	Hue fine	Saturation	Color Tempe.	Strobe	Dimmer Speed



11CH	1	2	3	4	5	6	7	8	9	10	11
%	Dimmer	Red dimmer	Green dimmer	Blue dimmer	Lemon dimmer	Amber dimmer	Cyan dimmer	Deep blue dimmer	Preset Color	Strobe	Dimmer Speed







7.5kg(16.53lb)


High Power LED Cyclorama Light




Specification	
Product model	VG-LB1300C
Light sources	100pcs seven colors brand LED lamps, (R:24; G:18; B:12; Royal blue: 8; Cyan: 8; Amber: 12; Lime green: 20)
Input power	AC100-240V, 50/60Hz
Power	300W
CRI	Ra≥90
Color temp.	2700-8000K adjustable
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	7CH/9CH/11CH/15CH/17CH/22CH
Beam angle	30/25/15°
Cooling system	Copper tube convector + mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barndoor; DMX and Power cable
Net weight	9.5kg
Body size	630*180*260mm


Product details





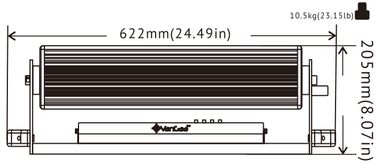


VG-LB1300C DMX Channel Layout













VG-LB1300L DMX Channel Layout









There are HSIC 7CH, SSP 11CH, TOUR 14CH, TOUR 22CH, PIXEL 9CH, PIXEL 17CH options

Features


- Equips with branded 7 colors led chips, can mix and obtain different color for theater using, bicolor one is optional;
- Use intelligent software, which can realize 2700K-8000K color temperature adjustable;
- High CRI more than 92Ra(95 optional), flicker free, 0-100% linear dimmer;
- 200W powerful LED cyclorama light, suitable for different scenes of theater and others;
- Compact structure, unique design style;
- Equips with imported different degree optics, 10/30/80 different degrees optional.

Application



Effect, Manufacturing & Package
































108x3W LED Cyclorama Light



DMX 512 | 16 bit | 2 YEARS QUALITY GUARANTEE | CE | RoHS


LED Cyclorama Light Series


Specification	
Product model	VG-LB1083
Light sources	108pcs 3W LED lamps
Input power	AC100-240V, 50/60Hz
Power	350W
Quantity of LED	R: 27; G: 27; B: 27; W: 27
Life span of LED	50000h
Dimmer	0-100% linear dimmer
Control panel	digital display+4 buttons
DMX channel	8CH
Beam angle	60*120°
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8.5kg
Body size	480*270*127mm


Product details




8CH	1	2	3	4	5	6	7	8
%	Dimmer	Red	Green	Blue	White	Strobe	Color Autorun	Autorun speed

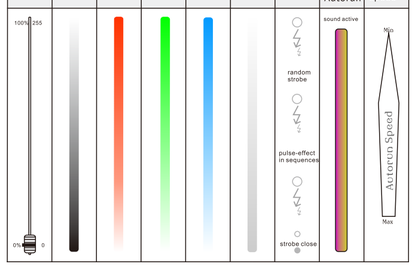















36x3W LED Cyclorama Light




DMX 512 | 16 bit | 2 YEARS QUALITY GUARANTEE | CE | RoHS


LED Cyclorama Light Series

Specification	
Product model	VG-LB363
Light sources	36pcs 3W (R: 9pcs, G: 9pcs, B: 9pcs, W: 9pcs) LEDs
Input power	AC100-240V, 50/60Hz
Power	100W
Quantity of LED	R: 9; G: 9; B: 9; W: 9
Life span of LED	50000h
Dimmer	0-100% linear dimmer
Control panel	digital display+4 buttons
DMX channel	6CH, 3CH
Beam angle	90°
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Power cable, signal cable
Net weight	4.9kg
Body size	420*350*385mm

Product details










4.9kg(10.8lb)

6CH	1	2	3	4	5	6
%	Dimmer	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Flash




3CH	1	2	3
%	Hue	Saturation	Intensity



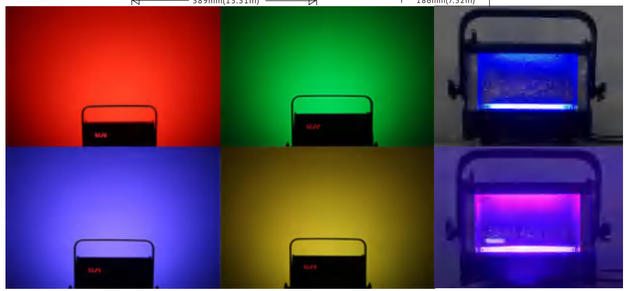


1000W HMI Fresnel Spot Light

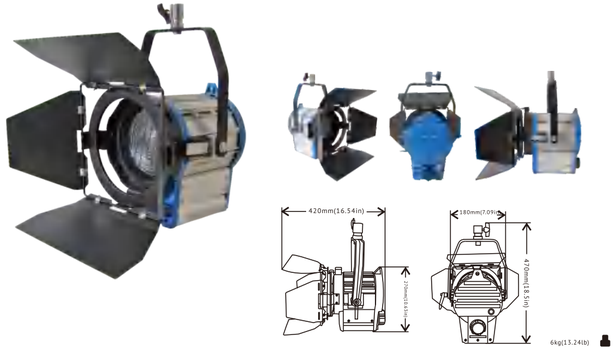

Specification	
Product model	VG-FL1000
Bulb	1pc 1000W lamp CP71, BP/1000W lamp CP40, MP
Input power	AC110V/AC220V, 50/60Hz (based on the input power of bulb)
Light output	1000W
Base	GY9.5
Average lifespan of lamp	5000h
Color	Warm white, 3200K
Dimmer	15-100% linear dimmer (dimmer cable optional)
Lens	¢130mm
Beam angle	15-60°
Control mode	manual
Control panel	switch, rotary knob
Dimension	D266*W300*H260mm
Net weight	6kg
Housing color	sliver and blue
Shell material	aluminium

650W HMI Fresnel Spot Light

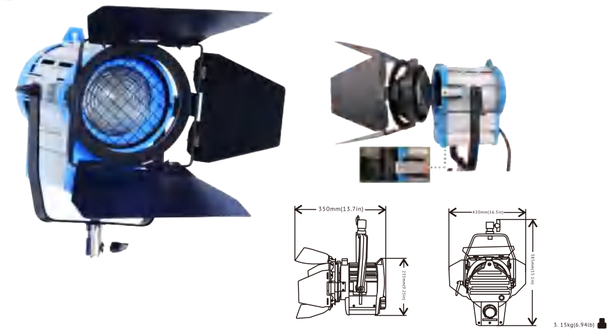

Specification	
Product model	VG-FL650
Bulb	1pc 650W lamp CP89, GY9.5
Input power	AC110V/AC220V, 50/60Hz (based on the input power of bulb)
Light output	650W
Base	GY9.5
Average lifespan of lamp	5000h
Color	Warm white, 3200K
Dimmer	15-100% linear dimmer (dimmer cable optional)
Lens	¢112mm
Beam angle	15-60°
Control mode	manual
Control panel	switch, rotary knob
Dimension	D210*W230*H235mm
Net weight	3.15kg
Housing color	sliver and blue
Shell material	aluminium

2000W HMI Fresnel Spot Light



Specification	
Product model	VG-FL2000
Bulb	1pc 2000W lamp, G38
Input power	AC110V/AC220V, 50/60Hz (based on the input power of bulb)
Light output	2000W
Base	G38
Average lifespan of lamp	5000h
Color	Warm white, 3200K
Dimmer	15-100% linear dimmer (dimmer cable optional)
Lens	¢175mm
Beam angle	15-60°
Control mode	manual
Control panel	switch, rotary knob
Dimension	D340*W390*H330mm
Net weight	6.5kg
Housing color	sliver and blue
Shell material	aluminium

5000W HMI Fresnel Spot Light



Specification	
Product model	VG-FL5000
Bulb	1pc 5000W lamp, G38
Input power	AC110V/AC220V, 50/60Hz (based on the input power of bulb)
Light output	5000W
Base	Gy38
Average lifespan of lamp	5000h
Color	Warm white, 3200K
Dimmer	15-100% linear dimmer (dimmer cable optional)
Lens	¢250mm
Beam angle	15-60°
Control mode	manual
Control panel	switch, rotary knob
Dimension	D620*W610*H670mm
Net weight	18.9kg
Housing color	sliver and blue
Shell material	aluminium

800W HMI Red Flash Light



Specification	
Product model	VG-RL800
Bulb	1pc 800W lamp
Input power	AC110V/AC220V, 50/60Hz (based on the input power of bulb)
Light output	800W
Average lifespan of lamp	5000h
Color	Warm white, 3200K
Dimmer	15-100% linear dimmer (dimmer cable optional)
CRI	more than 90Ra
Beam angle	15-60°
Control mode	manual
Control panel	switch, rotary knob
Dimension	140mm diameter*150mm in length
Net weight	2kg
Housing color	red

Product details



Mini Wireless 192CH DMX Console



Specification	
Product model	Mini DMX192
Power supply	Electronic auto-ranging
Controllable DMX512 channels	192
Max fixtures	30
Max fixture channels	192
Wireless	2.4Ghz
DMX output port	2
IP rating	Ip20
Appearance color	Black
Housing materials	ABS
Dimension	300Dx130Wx40Hmm
Net weight	1.1kg

Mini Wireless 384CH DMX Console



Specification	
Product model	Mini DMX384
Power	DC9-12V or 5V power bank
Controllable DMX512 channels	384
Max fixtures	30
Max fixture channels	384
Wireless	2.4Ghz
DMX output port	2
IP rating	Ip20
Appearance color	Black
Housing materials	ABS
Net weight	1.5kg

512CH DMX Console



Specification	
Product model	Great 512
Power	AC90-260V, 50/60Hz
Controllable DMX512 channels	512
Max fixtures	32, 16CH fixtures
Max fixture channels	512
Scenes	23 banks of 8 scenes, 240 scenes in total
DMX output port	2
IP rating	Ip20
Appearance color	Black
Housing materials	ABS
Net weight	1.5kg

384 DMX Channels DMX-512 Console



Specification	
Product model	VG-DC384
Controllable DMX 512 channels	384
Max fixtures	30
Max fixture channels	32
Direct call of scenes	30
Chase program	30
Chase speed range	0.03s-180s
Chase trigger mode	Auto, music, swing
Chase direction control	Forward/inversion
Shape control	Yes, up to 50 SHAPE generators
LCD monitor	Yes
Flash-card port	Yes
Power	5W
Body size	485*267*85mm

Command Wing



Specification	
Product model	Command wing
Version	Ma2, 3.3.2.2
Package	Flight case
Flight case	69*51*20cm(1pc/case)
N.W/G.W	13kg/16.5kg

Fader Wing



Specification	
Product model	Fader wing
Version	Ma2, 3.3.2.2
Package	Flight case
Flight case	51*49*19cm(1pc/case)
N.W/G.W	9kg/12.5kg

1 DMX In 4 DMX Out DMX Splitter Light



Specification	
Product model	VG-SP1-4B
Ports	1 DMX in, 8 DMX out
Ports style	3pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	10W
Machine size	277*145*70mm
Net weight	2kg

1 DMX In 8 DMX Out DMX Splitter Light



Specification	
Product model	VG-SP1-8A
Ports	1 DMX in, 8 DMX out
Ports style	3 pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	10W
Machine size	280*150*70mm
Net weight	2kg

1 DMX In 8 DMX Out DMX Splitter Light



Specification	
Product model	VG-SP1-8B
Ports	1 DMX in, 8 DMX out
Ports style	3 pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	12W
Machine size	482*155*45mm (19" Rack, 1U)
Net weight	3kg

2 DMX In 8 DMX Out DMX Splitter



Specification	
Product model	VG-SP2-8A
Ports	2 DMX in, 8 DMX out
Ports style	3 pins or 5 pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	12W
Machine size	482*155*45mm (19"Rack, 1U)
Net weight	3kg

2.4G Wireless DMX Transmitter and Receiver



Specification	
Product model	VG-DWR2014
Signal strength	2.4G
Signal style	Sweden Wireless Solution
Receiving distance	500m(without obstruction)
Control panel	1 button
Power supply	common power supply
Input voltage	AC100V/240V, 50/60Hz
Power consumption	6W
Shell material	Aluminum alloy
Appearance color	black
IP rating	IP 20
Accessories	Power cable, C connector
Net weight	1.1kg

Outdoor 2.4G Wireless DMX Transmitter and Receiver



Specification	
Product model	VG-OWS2018
Signal strength	2.4G
Signal style	Sweden Wireless Solution
Receiving distance	500m(without obstruction)
Control panel	1 button
Power supply	common power supply
Input voltage	AC100V/240V, 50/60Hz
Power consumption	6W
Shell material	Aluminum alloy
Appearance color	black
IP rating	IP 65
Accessories	Power cable, C connector
Net weight	2.5kg



VG-C18



VG-C1



VG-C8s



VG-C2s



VG-S4



VG-S180



VG-S190A



VG-S190B



VG-HR001



VG-TK001



VG-LB001



VG-TPT2



VG-RD002



VG-TDS1.5



VG-LC006



VG-LC001

Some Cooperative Enterprises and Institutions

China Mobile Communication Corporation
China Unicom Communication Corporation
Sinopec
China Post
China Merchants Bank
Industrial and Commercial Bank of China
China Police
Land and Resources Bureau of Jiangsu Province
Beijing Media University
Shantou University
Zhejiang Police College
.....



Lecture Hall of China Mobile




Theater in Cyprus



Auditorium of Shaoguan College



Lecture Hall of ICBC Hubei Province

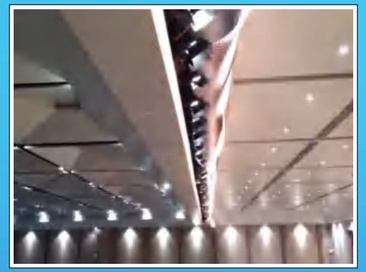

Theater of Dinghu College




Studio Room of Xiangtan TV Station



Shiyan TV Station



TV Station of Kaiyuan City, Yunnan

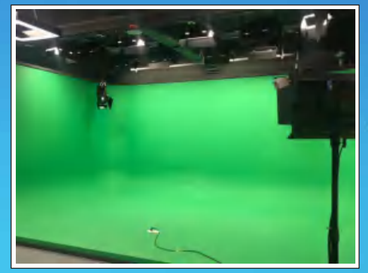

Studio Room of Guangdong Normal University



A Stage in China



An Events in China



A Stage in China



A Meeting Room



A Stage in China



An Event in Togo



A Stage in China

Innovation, Quality and Performance
Create a better feeling experience of light
VanGaa, Achieving Users' Value